

FORM PTO-1390 (Modified)  
(REV 11-99)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

**TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371**

**FUR0010-PCT**

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

**09/744611**INTERNATIONAL APPLICATION NO.  
**PCT/JP00/03443**INTERNATIONAL FILING DATE  
**29 MAY 2000**PRIORITY DATE CLAIMED  
**28 MAY 1999**TITLE OF INVENTION  
**BROADCAST SYSTEM**APPLICANT(S) FOR DO/EO/US  
**KEISEI YAMAMURO AND YASUYUKI SONODA**

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
  - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ has been transmitted by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ A copy of the International Search Report (PCT/ISA/210).
8. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
  - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ have been transmitted by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☐ have not been made and will not be made.
9. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
10. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
11. ☐ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

**Items 13 to 20 below concern document(s) or information included:**

13. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ Certificate of Mailing by Express Mail
20. ☐ Other items or information:

**ACKNOWLEDGEMENT POSTCARD**

U.S. APPLICATION NO. <b>09/744611</b> INTERNATIONAL APPLICATION NO. <b>PCT/JP00/03443</b>	ATTORNEY'S DOCKET NUMBER <b>FUR0010-PCT</b>	
---	--	--

21. The following fees are submitted: <b>BASIC NATIONAL FEE ( 37 CFR 1.492 (a) (1) - (5) ) :</b> <input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO ..... <b>\$1,000.00</b> <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO ..... <b>\$860.00</b> <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... <b>\$710.00</b> <input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... <b>\$690.00</b> <input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) ..... <b>\$100.00</b> <div style="text-align: right;"><b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b></div>	<b>CALCULATIONS PTO USE ONLY</b> <div style="border: 1px solid black; height: 100px; margin-top: 10px;"></div>
---	---

Surcharge of \$130.00 for furnishing the oath or declaration later than months from the earliest claimed priority date (37 CFR 1.492 (e)).		<input type="checkbox"/> 20 <input type="checkbox"/> 30	<b>\$0.00</b>
--	--	---	---------------

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	
Total claims	17 - 20 =	0	x \$18.00	<b>\$0.00</b>
Independent claims	9 - 3 =	6	x \$80.00	<b>\$480.00</b>
Multiple Dependent Claims (check if applicable). <input type="checkbox"/>				<b>\$0.00</b>
<b>TOTAL OF ABOVE CALCULATIONS =</b>				<b>\$1,340.00</b>

Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable).		<input type="checkbox"/>	<b>\$0.00</b>
<b>SUBTOTAL =</b>		<b>\$1,340.00</b>	

Processing fee of \$130.00 for furnishing the English translation later than months from the earliest claimed priority date (37 CFR 1.492 (f)).		<input type="checkbox"/> 20 <input type="checkbox"/> 30	<b>\$0.00</b>
<b>TOTAL NATIONAL FEE =</b>		<b>\$1,340.00</b>	

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable).		<input checked="" type="checkbox"/>	<b>\$40.00</b>
<b>TOTAL FEES ENCLOSED =</b>		<b>\$1,380.00</b>	

	Amount to be: refunded	\$
	charged	\$

☒ A check in the amount of **\$1,380.00** to cover the above fees is enclosed.  
☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \_\_\_\_\_ to cover the above fees.  
 A duplicate copy of this sheet is enclosed.  
☒ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. **50-1390** A duplicate copy of this sheet is enclosed.

**NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.**

SEND ALL CORRESPONDENCE TO:

**MICHAEL D. BEDNAREK**  
**SHAW PITTMAN**  
**2300 N STREET, N.W.,**  
**WASHINGTON, D.C. 20037-1128**

**41,434**

SIGNATURE

MICHAEL D. BEDNAREK

NAME

32,329

REGISTRATION NUMBER

JANUARY 26, 2001

DATE

FUR0010-PCT

PATENT

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of:

KEISEI YAMAMURA ET AL.

ATTN. APPLICATION BRANCH

Serial No. U.S. Nat'l. Phase of  
PCT/JP00/03443

Int'l. Filing Date: 29 MAY 2000

For: BROADCAST SYSTEM

PRELIMINARY AMENDMENT

Sir:

Prior to calculation of the filing fee, please amend the above-identified application as follows.

IN THE CLAIMS

Claim 4, lines 1 and 1, delete the words "or the reception device according to claim 3";

Claim 5, lines 1 and 2, delete the words "any one of claims 1-4" and insert therefor - -  
claim 1- -;

Claim 6, lines 1 and 2, delete the words "any one of claims 1-5" and insert therefor - -  
claim 1- -;

Claim 7, lines 1 and 2, delete the words "any one of claims 1-6" and insert therefor - -  
claim 1- -;

Claim 8, lines 1 and 2, delete the words "any one of claims 1-7" and insert therefor - -  
claim 1- -.

Inventor: Keisei YAMAMURO et al.  
Attorney's Docket No. FUR0010-PCT  
U.S. Nat'l. Phase of PCT/JP00/03443

Claim 9, lines 1 and 2, delete the words "or the system according to any one of claims 1 and 3-8, and insert therefor - - claim 1 - -;

Claim 10, lines 1 and 2, delete the words "or the system according to any one of claims 1-9" and insert therefor - - claim 1 - -.


**REMARKS**

The foregoing amendment is being made to remove the multiple dependencies from claims 4, 5, 6, 7, 8, 9, and 10 as filed. No new matter has been added. A favorable action on the merits of the pending claims is respectfully requested.

Respectfully submitted,

KEISEI YAMAMURO ET AL.

By:

 41, 434  
Michael D. Bednarek  
Registration No. 32,329

SHAWPITTMAN  
2300 N Street, N.W.  
Washington, D.C. 20037-1128  
Tel: 202-663-8683

Date: **January 26, 2001**

Document #: 1115692 v.1

23/PRB

09/744611  
500 Rec'd PCT/PTO 2 6 JAN 2001

**SPECIFICATION**  
**BROADCAST SYSTEM**

**BACKGROUND OF THE INVENTION**

5 1. Field of the Invention

The present invention relates to a broadcast system, more specifically to generation and reconstruction of a transport stream.

10 2. Description of the prior art

When watching television, a meteorological information or an earthquake information may appear suddenly (see Fig. 21). In the broadcast system such as a television, there is a method for displaying an emergency information such as a meteorological information on the screen of the television set utilizing a message ID. The emergency broadcast using the message ID will be explained below.

First, all contents that are assumed for the emergency information are listed. Concerning each of the emergency information, it is determined where on the screen the emergency information is to be displayed. Numbering is performed for a set of contents of the emergency information and the display position on the screen. This number is a message ID. An example of a message ID table showing the relationship among the message ID, the display

position and the contents are shown in Fig. 22.

With reference to Fig. 23, it will be explained how the emergency information using the message ID is displayed on the screen of the television set. A contents provider  
5 transmits a message ID as the emergency information by an emergency information transmission device 201 when an emergency situation occurs. In an emergency information multiplex device 203, a video signal obtained by a TV program transmission device 204 and the message ID are multiplexed so as to send them to a TV transmitter 205. The TV transmitter 205 transmits the video signal and the message ID.

Each TV receiver receives the signal by the RF reception portion 206 and sends the signal to the video demodulation portion 207. The video demodulation portion 207 demodulates the video signal from the received signal. In addition, a color signal demodulation portion 208 demodulates a color information.

On the other hand, an emergency information process  
20 portion 209 extracts the message ID from the received signal. The extracted message ID is compared with a memorized message ID table, so as to extract characters to be displayed (e.g., "meteorological information ") and a output form from the message ID table. A character  
25 generation portion 210 generates a video signal related to

the characters extracted by the emergency information processing portion 209. In addition, an electronic sound generator 211 generates an atmos that is used when displaying the characters in accordance with the extracted output form.

The characters generated by the character generation portion and the picture of the program are memorized in a display memory 212. Then, a switching mixer 213 switches a picture with an emergency information and a normal program picture.

The above-mentioned emergency broadcast utilizing a message ID has some problems as follows.

The message ID is set for each of the emergency information that is assumed considering the display position and the output contents. In addition, concerning the particularly important emergency information, adding to the display position, a display method such as a sound with the display or a blink display should be considered, so as to arrest audience's attention.

When setting the message ID, the more the above-mentioned points to be considered, the more the number of the message ID becomes.

In addition, since the contents of the emergency information is determined corresponding to the message ID, it is difficult to support promptly for an unexpected

emergency situation.

Furthermore, as the content of the emergency information output is pre-determined corresponding to the message ID, it is necessary to store the output content data. Normally, the memory capacity for storing the output content is not large. Consequently, the type of output content that can be stored is limited to types of data that do not take up a great deal of space, such as text.

An object of the present invention is to provide a broadcast system which is capable of displaying the output content of the sub contents, without annotating the sub contents with output form-related script in order to display the output content on the screen.

An object of the present invention is to provide a broadcast system that can support any type of information display with fewer messages IDs.

#### SUMMARY OF THE INVENTION

In this invention, a transmission device generates sub contents data including an output form ID that indicates an output form of sub contents and output contents data that indicate output contents, generates a transport stream by multiplexing at least main contents data and the sub contents data, and transmits the generated transport stream. A reception device receives the



transport stream transmitted by the transmission device,  
determining the output form of the sub contents data in  
accordance with the output form that is predetermined for  
the output form ID in the received sub contents data, and  
5 determining the output contents of the sub contents data in  
accordance with the output contents data in the received  
sub contents data, so as to perform the reconstruction  
control of the sub contents data, and controls  
reconstruction of the main contents in accordance with the  
received transport stream.

Thus, it is possible to reconstruct the output  
contents of the sub contents, without writing an output  
form-related script in the sub contents in order to display  
the output contents on the screen. Thus, a plurality of  
output contents data can correspond to one output form ID.

In this invention, sub contents data are generated  
that include an output form ID that indicates an output  
form of the sub contents as well as an output contents data  
that indicate an output contents, and a transport stream is  
20 generated by multiplexing at least main contents data and  
the sub contents data.

Thus, sub contents can be generated in which a  
plurality of output contents data corresponds to one output  
form ID.

25 In this invention, a transport stream transmitted by

a transmission device is received, the output form of the sub contents data is determined in accordance with the output form that is predetermined for the output form ID in the received sub contents data, and the output contents of the sub contents data are determined in accordance with the output contents data in the received sub contents data, so as to control the reconstruction of the sub contents data.

Thus, sub contents can be reconstructed in which a plurality of output contents data corresponds to one output form ID.

In this invention, an output form table describing the output form ID and the output form corresponding thereto is recorded.

Thus, an output form corresponding to the output form ID can be obtained easily.

In this invention, the output form includes at least a display position of the sub contents.

Thus, the relationship between the output form ID and the display position can be predetermined. Accordingly, by determining the output form ID, the display position is also determined.

In this invention, the output form includes at least information about whether the sub contents are outputted or not.

Thus, the relationship between the output form ID and

the information about whether the sub contents are outputted or not can be predetermined. Accordingly, if the output form ID is determined, whether the sub contents are outputted or not is also determined.

5 In this invention, the output form includes at least an output time of the sub contents.

Thus, the relationship between the output form ID and the output time of the sub contents can be predetermined. Accordingly, if the output form ID is determined, the  
10 output time of the sub contents is also determined.

In this invention, the output form includes at least an output condition of the sub contents.

Thus, relationship between the output form ID and the output condition of the sub contents can be predetermined. Accordingly, if the output form ID is determined, the  
15 output condition of the sub contents is also determined.

In this invention, the reception device determines the output form of the sub contents in accordance with a predetermined output form when the received output form ID  
20 is not a predetermined one.

Thus, even if an output form ID that is not predetermined is received, the output form of the sub contents can be determined securely.

In this invention, the sub contents are commercial.  
25 Thus, the output form of the commercial can be specified by

the output form ID.

In this invention, sub contents are emergency information. Thus, output form of the emergency information can be specified by the output form ID.

5 Contents data according to this invention are contents data in which main contents data and sub contents data are multiplexed, and the sub contents data include an output form ID that indicates an output form of the sub contents and output contents data that indicate output contents.

Thus, the output form can be specified by the output form ID, so that the sub contents data can be generated easily.

10 In a reconstruction program according to this invention, the output form of the sub contents data is determined in accordance with a predetermined output form for an output form ID in the sub contents data, and output contents of the sub contents data are determined in accordance with output contents data in the sub contents  
15 data, so as to perform reconstruction control of the sub contents data.

Thus, a plurality of output contents data can correspond to one output form ID.

20 A data structure according to this invention includes an output form description portion that describes an output

form and an output form ID description portion that describes an output form ID corresponding to the output form described in the output form description portion.

Thus, only by specifying the output form ID the  
5 output form can be determined.

The multiplex portion executes the operation of step S705 and step S707 of the flowchart shown in Fig. 12. In addition, the reconstruction portion executes the operation of step S803-S811 of the flowchart shown in Fig. 13.

The relationship between the elements specified in the claims and the elements described in the embodiments are as follows. The transmission device corresponds to a digital broadcast transmission device 31. The reception device corresponds to a digital broadcast reception device 41. The multiplex portion corresponds to a CPU 310. The transmission portion corresponds to a transmission circuit 313. The reception portion corresponds to a reception circuit 413. The demodulation portion corresponds to a CPU 410.

20 Furthermore, the output form ID corresponds to a message ID, and the output contents data corresponds to emergency information and commercial-related data.

The output form table corresponds to the reference table T1, T3 of the message ID and output form. The output  
25 form description portion corresponds to an output form

description portion a3, and the output form ID description portion corresponds to a message ID description portion a1.

#### BRIEF DESCRIPTION OF THE DRAWINGS

5        Fig. 1 is a block diagram of the functions of a first embodiment of the broadcast system according to the present invention.

      Fig. 2 is a conceptual drawing of the broadcast system in the first embodiment.

10       Fig. 3 shows the hardware configuration of the digital broadcast transmission device 81 shown in Fig. 2.

      Fig. 4 shows the hardware configuration of the digital broadcast reception device 91 shown in Fig. 2.

15       Fig. 5 shows the data structure of a reference table of the message ID and output form.

      Fig. 6 shows an example of a reference table of the message ID and output form having the data structure of Fig. 5.

20       Fig. 7 shows an example of the relationship between representative situations in which each message ID is used, and the message ID.

      Fig. 8 shows an example in which sub contents data sent by the digital broadcast transmission device 81 has been described by a script.

25       Fig. 9 shows the commercial displayed by the script

in Fig. 8.

Fig. 10 shows an example in which sub contents data sent by the digital broadcast transmission device 81 has been described by a script.

Fig. 11 shows the commercial displayed by the script in Fig. 10.

Fig. 12 is a flowchart showing the actions of the CPU 310 of the digital broadcast transmission device 81.

Fig. 13 is a flowchart showing the actions of the CPU 410 of the digital broadcast reception device 91.

Fig. 14 is a brief illustration of case 1 of the first embodiment.

Fig. 15 shows changes in the screen of the display device 417 in case 1.

Fig. 16 shows changes in the screen of the display device 417 in case 1.

Fig. 17 is a conceptual drawing of the broadcast system in a second embodiment.

Fig. 18 shows a data structure of the reference table of the message ID and output form.

Fig. 19 shows an example of a reference table of the message ID and output form having the data structure of Fig. 18.

Fig. 20 shows an example in which sub contents data sent by the digital broadcast transmission device 31 has

been described by a script.

Fig. 21 shows a screen in the case that emergency information is displayed on an existing broadcast system.

Fig. 22 shows an example of a conventional message ID table.

Fig. 23 is a constitutional diagram of a transmission device and a reception device in a conventional broadcast system.

## DESCRIPTION OF THE PREFERRED EMBODIMENTS

### [First Embodiment]

#### 1. General Structure

Fig. 1 is a functional block diagram of a broadcast system according to a first embodiment of the present invention. A broadcast system 1 includes a transmission device 3 and a reception device 5.

The transmission device 3 includes a multiplex portion 11 and a transmission portion 13. The reception device 5 includes a reception portion 15 and a demodulation portion 17.

The multiplex portion 11 multiplies at least main contents data and sub contents data so as to generate a transport stream. The transmission portion 13 transmits the transport stream generated by the multiplex portion 11.

The reception portion 15 receives the transport



stream transmitted by the transmission device 3. The demodulation portion 17 determines an output form of the sub contents data in accordance with the output form that is predetermined for the output form ID in the received sub contents data and determines the output contents of the sub contents data in accordance with the output contents data in the received sub contents data, so as to perform the reconstruction control of the sub contents data.

In addition, an output form table describing the output form ID and the output form corresponding thereto is recorded in the reception device 5. Furthermore, the reception device 5 determines the output form of the sub contents in accordance with a predetermined output form when the received output form ID is not a predetermined one.

In addition, sub contents are emergency information.

The output form includes at least display position of the sub contents. Furthermore, the output form includes at least information about whether the sub contents are outputted or not. In addition, the output form includes at least an output time of the sub contents. In addition, the output form includes at least an output condition of the sub contents.

In addition, the reception device 5 determines the output form of the sub contents in accordance with a predetermined output form when the received output form ID

is not a predetermined one.

Thus, a plurality of output contents data can be assigned to one output form ID.

## 2. Overview of the broadcast system

Fig. 2 shows an embodiment of the broadcast system shown in Fig. 1, which is a digital broadcast system 71 including a digital broadcast transmission device 81 and a digital broadcast reception device 91. Before the explanation of the digital broadcast system 71, a digital broadcast will be explained shortly.

### 2.1. Digital broadcast

At present, contents of the WWW (World Wide Web) are generally described in HTML (Hyper Text Markup Language). Such contents described in HTML (hereinafter, referred to as HTML format contents) can handle moving pictures and sounds simultaneously. In addition, using a script language such as JavaScript, an interactive operation can be realized.

It is studied to utilize the HTML format contents having such characteristics for a digital broadcast system. In this way, a program and information such as images, sounds or character information related to the program can be dealt with simultaneously. For example, the so-called digital multiplex broadcast can be realized by transmitting an HTML format contents about the program and the

performers.

Furthermore, a digital broadcast system in which the transmission side transmits the HTML format contents about the program collectively, and the reception side memorizes the transmitted HTML format contents in a memory can provide an operation of getting data interactively.

By utilizing the digital broadcast, audiences can get information about the performers while watching the program, so as to understand the detail of the program or to enjoy the program more. Furthermore, since the interactive operation can be experienced, the system can support various needs of the audiences in detail.

## 2.2 Overview of the broadcast system of the present embodiment

The digital broadcast system 71 of the present embodiment will be described based on Fig. 2. The digital broadcast transmission device 81 transmits programs to each digital broadcast reception device 91, and also transmits commercials thereto. At this time, commercials are transmitted via the digital broadcast system 71 using event messages.

An event message is made up of a message ID consisting of alphanumeric characters and the like, and output content showing emergency information content.

When a digital broadcast reception device 91 receives

an event message, the device determines the output form based on the message ID, then displays a commercial on a display device 417 based on the determined output form.

Thus, it is possible to switch between programs and commercials by sending and receiving commercials using event messages.

Hereinafter, the digital broadcast system 71 will be explained in detail. The digital broadcast system 71 is to be based on MPEG2 standard, DSM-CC standard, DVB-SI standard and BML standard (the standard related to the data broadcasting in the BS digital broadcasting).

The MPEG2 standard is described in ISO/IEC13818-1 and ISO/IEC13818-2. DSM-CC standard is described in ISO/IEC13818-6. Furthermore, DVB-SI standard is described in ETSI ETS 300 468 (ARIB STD-B10 Version 1.2 in Japan), and BML standard is described in ARIB STD-B24 Version 1.1.

### 3. Hardware structure

#### 3.1. Hardware structure of the digital broadcast transmission device 81

Fig. 3 shows a hardware structure of the digital broadcast transmission device 81. The digital broadcast transmission device 81 includes a CPU 310 for processing operations such as generation of the transport stream or control of each portion, a memory 311 for used for working area of the CPU 310, a transmission circuit 313 for

transmitting the generated transport stream externally, an interface 314 for controlling the input and the output between the CPU 310 and the external equipment, and a keyboard 315 and a mouse 316 as input means for an operator to input characters and instructions. The memory 311 stores a program for controlling the operation of the CPU 310.

The digital broadcast transmission device 81 is connected to external equipment such as a recording device 317, a display device 318 and a main contents generation device 319. The recording device 317 records digital data and may be composed of a hard disk drive or a floppy disk drive. The display device 318 displays main contents data and sub contents data. The main contents generation device 319 generates main contents and may be a video camera or an image edit device for editing an image obtained by a video camera.

### 3.2. Hardware structure of the digital broadcast reception device 91

Fig. 4 shows a hardware structure of the digital broadcast reception device 91. The digital broadcast reception device 91 includes a CPU 410 for processing operations such as selection of the transport stream or occasional decision whether a unique event message is transmitted or not, a memory 411 for memorizing a program

for controlling the operation of the CPU 410 and for used  
for working area of the CPU 410, a reception circuit 413  
for receiving a transport stream externally and an  
interface 414 for controlling input and output between the  
6 CPU 410 and the external equipment. The memory 411  
memorizes a program for controlling the operation of the  
CPU 410 and a reference table T3 of the message ID and the  
output form that will be explained later.

The digital broadcast reception device 91 is  
10 connected to a remote controller 415, a recording device  
416 and a display device 417 as the external equipment.  
The remote controller 415 transmits and receives signals  
for operating the contents that are displayed on the  
display device 417. The recording device 416 records  
15 digital data, and may be a hard disk drive or a floppy disk  
drive. The display device 417 displays at least the main  
contents data and the sub contents data.

#### 4. Main contents data and sub contents data

Hereinafter, the main contents data and the sub  
20 contents data will be explained.

##### 4.1. Main contents data

The main contents data means data to be a heart in  
the broadcast. For example, the above-mentioned program  
(such as dramas, varieties or news) or the HTML format  
25 contents correspond the main contents data.

The generation of the main contents data is the same as the generation of the picture and sounds in the conventional television broadcast system or the generation of web contents in the WWW. Accordingly, a detailed explanation about the generation of the main contents data is omitted.

#### 4.2. Sub contents data

The sub contents data means data except the main contents data such as the above-mentioned commercial.

In this embodiment, the commercial is regarded as the sub contents data. The event message is used for transmission and reception of the commercial. When the commercial is transmitted, the output contents including the message ID and the contents of the commercial are multiplexed on the usual program.

Concerning the output contents, the contents generator of the commercial describes the contents in the script format. In this way, by describing the output contents in the script format, the contents generator can generate the contents freely.

On the other hand, when the commercial is received, a output form that matches the received message ID is extracted from the reference table T3 of the message ID and the output form. The received output contents are displayed in accordance with the extracted output form.

Hereinafter, the message ID and the script will be explained.

#### 4.2.1 Message ID and reference table of the message ID and the output form

Fig. 5 shows a data structure of the reference table of the message ID and the output form memorized in the memory 411. In the message ID table of the conventional event message (see Fig. 22), output contents and output form are defined for each message ID.

However, in the reference table of the message ID and the output form of the event message of this embodiment, only a output form is defined for each message ID.

The reference table of the message ID and the output form consists of a message ID description portion a1 and an output form description portion a3. The output form description portion a3 includes a display position description portion a31 that describes the display position of the sub contents, an output yes or no description portion a33 that describes whether the sub contents are outputted or not, an output time description portion a35 that describes the output time of the sub contents, an output condition description portion a37 that describes the output condition of the sub contents, and a temporary storage data description portion a39 that indicates what data is to be temporarily stored in the memory 411, as well



as a display data location description portion 441 that indicates what data is to be output.

Fig. 6 shows an example of the reference table T3 of the message ID and the output form having the above-mentioned data structure. The reference table T3 of the message ID and the output form includes blocks b1, b2 , b3,... corresponding to each message ID.

Here, an example of the relationship between representative situations in which each message ID is used and the message ID is shown in Fig. 7.

Message ID "0x01" is used to switch from the display of main contents being displayed on the display device 417 to display sub contents. That is, it is used to interrupt the display of main contents and begin the display of sub contents. Consequently, when a digital broadcast reception device 91 receives a "0x01" message ID it must perform the following actions.

"When the message ID is retrieved", "the current time stamp of the main contents (data indicating the amount of time played from the beginning of the content)" is temporarily stored in the memory 411, and "the output content data of the received sub contents" is output to "the window active at that time" "without adding" any flashing or other effects to the output content.

The "0x01" message ID needs to execute this action on

a digital broadcast reception device 91. When this message ID is written in a message ID table, the following data is stored in block b1: "0x01" is stored in area b11, which corresponds to the output form description portion;

5 "active" is stored in area b13, which corresponds to the display position description portion; "output" is stored in area b15, which corresponds to the output yes or no description portion; "message ID retrieval time" is stored in area b17, which corresponds to the output time description portion; "- (none)" is stored in area b19, which corresponds to the output conditions description portion; "main contents time stamp" is stored in area b21, which corresponds to the temporary storage data description portion; and "received output content" is stored in area

15 b23, which corresponds to the display data location description portion.

Below, the message IDs "0x02," "0x03," "0x04," and "0x05" shown in Fig. 12 will be described in the same manner. Message ID "0x02" is used to interrupt the display

20 of sub contents being displayed on the display device 417, and re-initiate the playback of main contents that was being displayed previously. Consequently, when a digital broadcast reception device 91 receives a "0x02" message ID it must perform the following actions.

25 "When the message ID is retrieved", "the current time

stamp of the sub contents in the memory 411" is temporarily stored, and "the main content" is "output" to "the window active at that time" based on the time stamp stored in the memory 411 indicating the last interrupt time "without  
5 adding" any flashing or other effects to the output content.

The "0x02" message ID needs to execute this action on a digital broadcast reception device 91. When this message ID is written in a message ID table, the following data is stored in block b2: "0x02" is stored in area b11, which corresponds to the output form description portion;  
10 "active" is stored in area b13, which corresponds to the display position description portion; "no output" is stored in area b15, which corresponds to the output yes or no description portion; "message ID retrieval time" is stored in area b17, which corresponds to the output time description portion; "- (undefined)" is stored in area b19, which corresponds to the output conditions description portion; "sub contents time stamp" is stored in area b21, which corresponds to the temporary storage data description  
15 portion; and "main content" is stored in area b23, which corresponds to the display data location description portion.

Message ID "0x03" is used to terminate the display of sub contents being displayed on the display device 417, and  
25 re-initiate the playback of main contents that was being

displayed before. Consequently, when a digital broadcast reception device 91 receives a "0x03" message ID it must perform the following actions.

"When the message ID is retrieved", the display of  
5 sub contents is terminated. and "the main content" is  
"output" to "the window active at that time" based on the  
main contents time stamp stored in the memory 411 "without  
adding" any flashing or other effects to the output content.

The "0x03" message ID needs to execute this action on  
10 a digital broadcast reception device 91. When this message  
ID is written in a message ID table, the following data is  
stored in block b3: "0x03" is stored in area b11, which  
corresponds to the output form description portion;  
"active" is stored in area b13, which corresponds to the  
15 display position description portion; "no output" is stored  
in area b15, which corresponds to the output yes or no  
description portion; "message ID retrieval time" is stored  
in area b17, which corresponds to the output time  
description portion; "-" (undefined)" is stored in area b19,  
20 which corresponds to the output conditions description  
portion; "do not save" is stored in area b21, which  
corresponds to the temporary storage data description  
portion; and "main content" is stored in area b23, which  
corresponds to the display data location description  
25 portion.

Message ID "0x04" is used to terminate the display of main contents and sub contents being displayed on the display device 417. Consequently, when a digital broadcast reception device 91 receives a "0x04" message ID it must perform the following actions.

"When the message ID is retrieved", the display of content to "the window active at that time" is terminated.

The "0x04" message ID needs to execute this action on a digital Broadcast reception device 91. When this message ID is written in a message ID table, the following data is stored in block b4: "0x04" is stored in area b11, which corresponds to the output form description portion; "active" is stored in area b13, which corresponds to the display position description portion; "no output" is stored in area b15, which corresponds to the output yes or no description portion; "message ID retrieval time" is stored in area b17, which corresponds to the output time description portion; "-" (undefined)" is stored in area b19, which corresponds to the output conditions description portion; "do not save" is stored in area b21, which corresponds to the temporary storage data description portion; and "none" is stored in area b23, which corresponds to the display data location description portion.

Message ID "0x05" is used to switch from the display

of main contents being displayed on the display device 417,  
to display previously received sub contents. That is, it is  
used to interrupt the display of main contents and resume  
the display of sub contents that had been previously  
5 received. Consequently, when a digital broadcast reception  
device 91 receives a "0x05" message ID it must perform the  
following actions.

"When the message ID is retrieved", "the current time  
stamp of the main content" is temporarily stored in the  
memory 411, and "the output content data of the sub  
contents stored in the memory 411" is output to "the window  
active at that time" "without adding" any flashing or other  
effects to the output content.

The "0x05" message ID needs to execute this action on  
a digital broadcast reception device 91. When this message  
ID is written in a message ID table, the following data is  
stored in block b5: "0x05" is stored in area b11, which  
corresponds to the output form description portion;  
"active" is stored in area b13, which corresponds to the  
display position description portion; "no output" is stored  
in area b15, which corresponds to the output yes or no  
description portion; "message ID retrieval time" is stored  
in area b17, which corresponds to the output time  
description portion; "- (none)" is stored in area b19.  
25 which corresponds to the output conditions description

portion: "main contents time stamp" is stored in area b21, which corresponds to the temporary storage data description portion; and "output content from memory" is stored in area b23, which corresponds to the display data location description portion.

In this way, message IDs and their corresponding output forms are stored in the reference table T3 of the message ID and output form. Note that the reference table T3 of the message ID and output form is stored in memory 411 of the digital broadcast reception device 91.

#### 4.2.2 Output content

With regard to the present embodiment, output content is data relating to commercials. For example, this data may be a commercial consisting of mixed images and sound, as in conventional television broadcasts, or it may be an image like the banner advertisements contained in Web content. Furthermore, it may also consist solely of text characters made up of text data. This type of commercial generation can apply existing commercial generation methods, and so the generation process will be omitted here.

#### 4.2.3 Scripts

Fig. 8 shows an example of self description-type data in the case where a commercial is displayed on a display device 417 using the above-mentioned message IDs. The content generator writes the message ID to the head portion

H3 specified by the <head> ... </head> self description-type data tags.

The message ID is written to the event\_msg\_id in the event description portion E3 specified by the <event> ...

5 </event> tags in the head portion H3.

Additionally, the entire script is written, specifying the commercial content - which is the output content - to be displayed in the display area, via the <html> ... </html> tags. More specifically, @media: within the <style> ... </style> tags describes what type of media to display thereto. In Fig. 8, a commercial is to be displayed on television, so the descriptor is @media:tv. #text1 and #text2 specify the position in which text is to be displayed in the commercial. The text to be displayed in the commercial is described within <body> ... </body>.

The commercial displayed by this script (hereinafter "CM1") is shown in Fig. 9.

The present embodiment is a broadcast system capable of displaying a commercial even with an output form not defined in the reference table T3 of the message ID and output form.

In order to display a commercial in an output form not defined with a message ID in the reference table T3 of the message ID and output form, a script containing a message ID not defined in the reference table T3 of the



message ID and output form is sent from the broadcaster.

When the CPU 410 of the digital broadcast reception device 91 retrieves a message ID not defined in the reference table T3 of the message ID and output form, it displays the commercial based on the retrieved script. Note that in this case, the script must describe the output form with which to display the commercial on the display device 417.

Fig. 10 shows a sample script of this type. The content generator writes the message ID in the head portion H5 specified by the <head> ... </head> self description-type data tags.

The message ID is written to the event\_msg\_id in the event description portion E5 specified by the <event> ... </event> tags in the head portion H5.

Additionally, the entire script is written, specifying the commercial - which is the output content - to be displayed in the display area, via the <html> ... </html> tags. More specifically, @media: within the <style> ... </style> tags describes what type of media to display. In Fig. 10, a commercial is to be displayed on television, so the descriptor is @media:tv. #text1 and #text2 specify the position in which text is to be displayed in the commercial. The text to be displayed in the commercial is written within <body> ... </body>.

Furthermore, the output form with which to display the commercial on the display device 417 is defined by the change() function. in the script description portion S5, specified by the <script> ... </script> tags. In the present embodiment, the change() function contains a script which opens a new window, and displays the contents of the commercial in that window. Note that a concrete description of the change() function is omitted from Fig. 10.

The commercial displayed by this script (hereinafter "CMZ") is shown in Fig. 11.

#### 4.3. Flowchart

Next, the operation of the digital broadcast transmission device 81 having the above-mentioned structure and the digital broadcast reception device 91 will be explained. Fig. 12 shows a flowchart of the operation performed by the CPU 310 of the digital broadcast transmission device 81. Fig. 13 shows a flowchart of the operation performed by the CPU 410 of the digital broadcast reception device 91.

The operation of the CPU 310 of the digital broadcast transmission device 81 will be explained with reference to Fig. 12. When an commercial is transmitted, the contents generator generates sub contents data for transmitting the commercial, by using the script. The generated sub

contents data that are described in the script are given to the digital broadcast transmission device 81. The CPU 310 decides whether the sub contents data are obtained or not (S703). Until the sub contents data are obtained, it is in the waiting state.

The decision whether the sub contents data are obtained or not can be replaced with an automatic decision by the digital broadcast transmission device 81. Furthermore, when the sub contents data are obtained, verification that it is the sub contents data can be required to the user so as to decide that the data are obtained when the verification is obtained.

When the sub contents data are obtained, the main contents data that are being transmitted and the obtained sub contents data are multiplexed so as to generate the transport stream (S705). Then, the generated transport stream is transmitted (S707). When the transport stream is transmitted to each home finally, the transport stream is made into packets. Furthermore, the packets of transport stream are transmitted in accordance with a transmission protocol defined in the digital broadcast.

Next, the operation of the CPU 410 of the digital broadcast reception device 91 will be explained with reference to Fig. 13. The CPU 410 decides whether the packets of the transport stream repeatedly transmitted by

the broadcasting station in accordance with the transmission rule are received or not (S801). If the packets of the transport stream are not received, the CPU becomes waiting state until it is received.

5 If the packets of the transport stream are received, the packet that is the object to be selected (i.e., the packet that includes sub the contents data) is selected from the received transport stream in accordance with a predetermined selection condition (S803).

10 It is decided whether the selected packet includes a predetermined message ID or not (S805). For this decision, the reference table T3 of the message ID and the output form recorded in the memory 411 of the digital broadcast reception device 91 is referred.

15 If the predetermined message ID is included, the output form that corresponds to the message ID is extracted from the reference table T3 of the message ID and the output form (S807).

20 In addition, the output contents data are extracted in accordance with the self description type data included in the packet that has been selected in step S803 (S809). Then, the sub contents data are reconstructed in accordance with the output form that has been extracted in step S807 and the output contents data that have been extracted in  
25 step S809 (S811).

After that, the reconstructed sub contents data are transmitted to the display device 417, so that the sub contents data are displayed on the display device 417.

If the predetermined message ID is not received in step S805, the script for displaying the sub contents data is extracted from the self description type data stored in the packet that has been selected in step S803 (S813). Then, the sub contents data are reconstructed in accordance with the extracted script (S811).

#### 4.4 Example of switch between program and commercial

Next is given an actual example of how to switch between a program and a commercial, making reference a case 1 as shown in Fig. 14.

##### 4.4.1 Case 1 (see Fig. 14)

from  $t=t_0$  to  $t=t_1$ , broadcast program 1

from  $t=t_1$  to  $t=t_2$ , broadcast CM1

from  $t=t_2$  to  $t=t_3$ , broadcast program 1

from  $t=t_3$  to  $t=t_4$ , broadcast CM2

from  $t=t_4$  to  $t=t_5$ , broadcast program 1

from  $t=t_5$  to  $t=t_6$ , broadcast CM2

at  $t=t_6$ , terminate broadcast

##### 4.4.2 Time $t=t_0$ to Time $t=t_1$

Assume that program 1, which is the main content, is already being broadcast at time  $t=t_0$ . In the case that the broadcaster attempts to broadcast CM1 as the output content

data in the sub contents at time  $t=t_1$ , the broadcaster uses the digital broadcast transmission device 81 to multiplex the script containing message ID "0x01" (hereinafter, "CM1 script") into data for the program 1, and sends it to ordinary households.

When the digital broadcast reception device 91 in each household receives the CM1 script, it extracts the "0x01" message ID therefrom. The device then determines the output form corresponding to message ID "0x01" based on the reference table T3 of the message ID and output form (see Fig. 6) stored in the memory 411.

CM1 is displayed on the display device 417 based on the determined output form. In addition, at the time when CM1 is displayed, the time stamp (TS1) of program 1 is temporarily stored in a predetermined area of the memory 411.

The change to the screen of the display device 417 at this time is shown in Fig. 15. As shown by arrow (1), the screen switches from program 1 to CM1.

#### 4.4.3 Time $t=t_2$ to Time $t=t_3$

In the case that the broadcaster attempts to terminate the broadcast of CM1 as the output content data in the sub contents at time  $t=t_2$ , the broadcaster uses the digital broadcast transmission device 81 to multiplex the message ID "0x03" into data for the program 1, and sends it

to ordinary households. At this time, the output content is not defined, and the content consists of empty data.

When the digital broadcast reception device 91 in each household receives the "0x03" message ID, the device  
5 determines the output form corresponding to message ID "0x03" based on the reference table T3 of the message ID and output form stored in the memory 411.

Since the output content data was never defined, there was never any data to display. In some cases, output content data may be defined, but with message ID "0x03" no output content data is displayed by the corresponding output form. Then, the program 1 broadcast is resumed, based on the time stamp (TS1) stored in the memory 417, showing the time at which the program was interrupted.

Note that while CMI is being broadcast, the data for program 1 is being delivered, and the digital broadcast reception device 91 is receiving this data. This data is stored in a predetermined location of the memory 411. When the halt on program 1 is released, and its broadcast is  
15 resumed, data for the program 1 stored in the memory 411 is used therefor.

The change to the screen of the display device 417 at this time is shown in Fig. 15. As shown by arrow (2), the screen switches from CMI to program 1.

#### 25 4.4.4 Time $t=t_3$ to Time $t=t_4$

Here is examined the case where the broadcaster attempts to broadcast a new CM2 as the output content data in the sub contents at time  $t=t3$ . Note that this example will assume that CM2 will not be displayed with an output form defined by a message ID, and that instead it will be displayed with another output form.

Furthermore, it will be assumed that the broadcaster displays CM2 in a separate window from the one in which program 1 is being displayed. In this case, the broadcaster uses the digital broadcast transmission device 81 to multiplex a script (hereinafter "CM2 script") into data for the program 1, and sends it to ordinary households.

When the digital broadcast reception device 91 in each household receives the CM2 script, it extracts the "0x01" message ID therefrom. However, the CM2 script does not contain a message ID defined in the reference table T3 of the message ID and output form. So at this time, the digital broadcast reception device 91 extracts the output form from the received CM2 script. The device then displays CM2 on the display device 417 based on the extracted output form. Additionally, the time stamp (TS3) when CM2 is being displayed for program 1, i.e., showing the time at which the program 1, was interrupted is temporarily stored in a predetermined location in the memory 417.



The change to the screen of this display device 417 at this time is shown in Fig. 15. As shown by arrow (3), the screen switches from program 1 to CM2, which is displayed in a different window from the program 1.

#### 5 4.4.5 Time t=t4 to Time t=t5

In the case that the broadcaster attempts to temporarily interrupt the broadcast of CM2 at time t=t4, as with the case of terminating CM1, the broadcaster uses the digital broadcast transmission device 81 to multiplex message ID "0x02" into data for the program 1, and sends it to ordinary households. At this time, no output content data is recorded.

When the digital broadcast reception device 91 in each household receives the "0x02" message ID, the device determines the output form corresponding to message ID "0x02" based on the reference table T3 of the message ID and output form stored in the memory 411.

Since the output content data was never defined, there was never any data to be displayed. In some cases, output content data may be defined, but with message ID "0x02" no output content data is displayed by the corresponding output form. Then, the program 1 broadcast is resumed, based on the time stamp (TS3) for the main contents stored in the memory 411.

At this time, the CM2 data received, including CM2's

output form, is stored in the memory 411.

The change to the screen of this display device 417 at this time is shown in Fig. 16. As shown by arrow (5), the screen switches from CM2, which had been displayed in a separate window from the program 1, to the program 1.

#### 4.4.6 Time $t=t_5$ to Time $t=t_6$

Assume that the broadcaster attempts to resume the broadcast of CM2, which had been interrupted, at time  $t=t_5$ . In this case, the broadcaster uses the digital broadcast transmission device 81 to multiplex the message ID "0x05" into data for the program 1, and sends it to ordinary households.

When the digital broadcast reception device 91 in each household receives the "0x05" message ID, the device displays CM2 to the display device 417, based on the CM2 data stored in the memory 411 when it was interrupted the previous time.

The change to the screen of this display device 417 at this time is shown in Fig. 16. As shown by arrow (4), the screen switches from the program 1 to CM2, in a separate window from that of the program 1.

Then when message ID "0x04" is received, the display of CM2 is terminated, as well as the data broadcast, based on the reference table T3 of the message ID and output form (see Fig. 16, arrow (6)).

These actions allow the digital broadcast system 71 to control two states: it can refer to commercials during programs, via the message ID types, and it is possible to run scripts in accordance with the content description.

5 This makes it possible to reduce the processing load on the CPU.

Furthermore, during content creation it is possible to realize outstanding functions without any need for the support of authoring tools.

## [SECOND EMBODIMENT]

### 1. OVERALL CONSTITUTION

The overall constitution of the present embodiment is the same as that of the first embodiment. In the present embodiment, however, the sub contents is emergency information.

### 2. Overview of the broadcast system

Fig. 17 shows an embodiment of the broadcast system shown in Fig. 1, which is a digital broadcast system 51 including a digital broadcast transmission device 31 and a digital broadcast reception device 41. Before the explanation of the digital broadcast system 51, a digital broadcast will be explained shortly.

#### 2.1. Digital broadcast

25 At present, contents of the WWW (World Wide Web) are

generally described in HTML (Hyper Text Markup Language). Such contents described in HTML (hereinafter, referred to as HTML format contents) can handle moving pictures and sounds simultaneously. In addition, using a script language such as JavaScript, an interactive operation can be realized.

It is studied to utilize the HTML format contents having such characteristics for a digital broadcast system. In this way, a program and information such as images, sounds or character information related to the program can be dealt with simultaneously. For example, the so-called digital multiplex broadcast can be realized by transmitting an HTML format contents about the program and the performers.

Furthermore, a digital broadcast system in which the transmission side transmits the HTML format contents about the program collectively, and the reception side memorizes the transmitted HTML format contents in a memory can provide an operation of getting data interactively.

By utilizing the digital broadcast, audiences can get information about the performers while watching the program, so as to understand the detail of the program or to enjoy the program more. Furthermore, since the interactive operation can be experienced, the system can support various needs of the audiences in detail.

## 2.2. Overview of the digital broadcast system 51 according to the present invention

The digital broadcast transmission device 31 transmits the number to each digital broadcast reception device 41 and transmits emergency information when an emergency situation has occurred. The digital broadcast system 51 transmits an event message when transmitting the emergency information.

The event message consists of a message ID made of numerals and characters and output contents indicating the contents of the emergency information.

The digital broadcast reception device 41 that has received the event message determines the output form in accordance with the message ID. The output form defines rules for displaying the output contents on the display device 417. Then, the output contents are displayed by the display device 417 in accordance with the determined output form.

Hereinafter, the digital broadcast system 51 will be explained in detail. The digital broadcast system 51 is to be based on MPEG2 standard, DSM-CC standard, DVB-SI standard and BML standard (the standard related to the data broadcasting in the BS digital broadcasting).

The MPEG2 standard is described in ISO/IEC13818-1 and ISO/IEC13818-2. DSM-CC standard is described in

ISO/IEC13818-6. Furthermore, DVB-SI standard is described in ETSI ETS 300 468 (ARIB STD-B10 Version 1.2 in Japan), and BML standard is described in ARIB STD-B24 Version 1.1.

### 3. Hardware structure

#### 3.1. Hardware structure of the digital broadcast transmission device 31

Fig. 3 shows a hardware structure of the digital broadcast transmission device 31. The digital broadcast transmission device 31 includes a CPU 310 for processing operations such as generation of the transport stream or control of each portion, a memory 311, a transmission circuit 313 for transmitting the generated transport stream externally, an interface 314 for controlling the input and the output between the CPU 310 and the external equipment, and a keyboard 315 and a mouse 316 as input means for an operator to input characters and instructions. The memory 311 stores a program for controlling the operation of the CPU 310.

The digital broadcast transmission device 31 is connected to external equipment such as a recording device 317, a display device 318 and a main contents generation device 319. The recording device 317 records digital data and may be composed of a hard disk drive or a floppy disk drive. The display device 318 displays main contents data and sub contents data. The main contents generation device

319 generates main contents and may be a video camera or an image edit device for editing an image obtained by a video camera.

### 3.2. Hardware structure of the digital broadcast reception device 41

Fig. 4 shows a hardware structure of the digital broadcast reception device 41. The digital broadcast reception device 41 includes a CPU 410 for processing operations such as selection of the transport stream or occasional decision whether a unique event message is transmitted or not, a memory 411 for memorizing a program for controlling the operation of the CPU 410 and for used for working area of the CPU 410, a reception circuit 413 for receiving a transport stream externally and an interface 414 for controlling input and output between the CPU 410 and the external equipment. The memory 411 memorizes a program for controlling the operation of the CPU 410 and a reference table of the message ID and the output form that will be explained later.

The digital broadcast reception device 41 is connected to a remote controller 415, a recording device 416 and a display device 417 as the external equipment. The remote controller 415 transmits and receives signals for operating the contents that are displayed on the display device 417. The recording device 416 records

digital data, and may be a hard disk drive or a floppy disk drive. The display device 417 displays at least the main contents data and the sub contents data.

#### 4. Main contents data and sub contents data

5 In the conventional broadcast system, a transmission side (generally a TV station) usually transmits programs. However, if an emergency situation such as a change of the meteorological information or an event has occurred, an emergency information is transmitted along with the normal program.

10 The transmission of the emergency information is the same in the digital broadcast system. Namely, in the digital broadcast system 51, a program and HTML format contents about the program are usually transmitted. However, when an emergency situation occurs, an emergency information is required to be transmitted along with the normal program and the HTML format contents.

##### 4.1. Main contents data

15 The main contents data means data to be a heart in the broadcast. For example, the above-mentioned program (such as dramas, varieties or news) or the HTML format contents correspond the main contents data.

20 The generation of the main contents data is the same as the generation of the picture and sounds in the conventional television broadcast system or the generation



of web contents in the WWW. Accordingly, a detailed explanation about the generation of the main contents data is omitted.

#### 4.2. Sub contents data

5       The sub contents data means data except the main contents data such as the above-mentioned emergency information.

10       In this embodiment, the emergency information is regarded as the sub contents data. The event message is used for transmission and reception of the emergency information. When the emergency information is transmitted, the output contents including the message ID and the contents of the emergency information are multiplexed on the usual program.

15       Concerning the output contents, the contents generator of the emergency information describes the contents in the script format. In this way, by describing the output contents in the script format, the contents generator can generate the contents freely.

20       On the other hand, when the emergency information is received, a output form that matches the received message ID is extracted from the reference table of the message ID and the output form. The received output contents are displayed in accordance with the extracted output form.

25       Hereinafter, the message ID, the reference table T1

of the message ID and the output form and the output contents will be explained.

#### 4.2.1 Message ID and reference table of the message ID and the output form

Fig. 18 shows a data structure of the reference table of the message ID and the output form. In the message ID table of the conventional event message (see Fig.22), output contents and output form are defined for each message ID.

However, in the reference table of the message ID and the output form of the event message of this embodiment, only a output form is defined for each message ID.

The reference table of the message ID and the output form consists of a message ID description portion a1 and an output form description portion a3. The output form description portion a3 includes a display position description portion a31 that describes the display position of the sub contents, an output yes or no description portion a33 that describes whether the sub contents are outputted or not, an output time description portion a35 that describes the output time of the sub contents, an output condition description portion a37 that describes the output condition of the sub contents.

Fig. 19 shows an example of the reference table T1 of the message ID and the output form having the above-

mentioned data structure. The reference table T1 of the message ID and the output form is memorized in the memory 411 of the digital broadcast reception device 41.

The the reference table T1 of the message ID and the  
5 output form includes blocks b1, b2 , b3,... corresponding to each message ID.

For example, the output form of the message ID "0x01" is defined as follows.

① The output contents data are displayed "in the area from the start position that is 50 pixels from the upper end and 300 pixels from the left end of the active window by a horizontal width of 400 pixels and a vertical width of 100 pixels. ② The output contents data is "always displayed ". ③ The output time is "not defined ". ④ The effect of the display such as blinking display of the output contents is "not defined."

The output form of this message ID "0x01" is described in the message ID table as follows. The code "0x01" is described in the area b11 corresponding to the  
20 output form description portion of the blocks b1. The code "active, 50, 300, 400, 100" is described in the area b13 corresponding to the display position description portion. The code "output Yes" is described in the area b15 corresponding to the output yes or no description portion.  
25 The code "--(not defined)" is described in the area b17 that

corresponds to the output time description portion. The code "-(not defined)" is described in the area that corresponds to the output condition description portion b19.

In this way, the message ID and the output form that corresponds to the message ID are described in the reference table T1 of the message ID and the output form.

#### 4.2.2 Output contents

In this embodiment, the output contents mean the information displayed within the above-mentioned display area. For example, the data is "Meteorological information! Heavy rain and flood warning in southern district of Hyogo."

The contents provider generates the sub contents including the message ID and the output contents.

#### 4.2.3 Example of the sub contents

Fig. 20 shows an example of the sub contents data that are transmitted by the digital broadcast transmission device 31 and are described by the script so as to display the above-mentioned output contents on the display device 417 of the digital broadcast reception device 41. When the emergency situation occurs, the contents provider generates the sub contents data as shown in Fig. 20. The transmission side use the digital broadcast transmission device 31 for multiplexing the sub contents data on the main contents data so as to transmit the resulted data.

The script shown in Fig. 20 will be explained. The contents generator describes the message ID and the output contents at the head portion H1 in the tag <head>-</head> of the self description type data.

5 The message ID is described at the message\_id in the event description portion E1 of the tag <bevent>-</bevent> in the head portion H1.

10 Furthermore, the output contents that are displayed in the display area are described in the function defined by "onoccur" in the event description portion E1. This function is defined for the contents generator to perform a desired operation.

15 With reference to Fig. 20, an event\_handler1 function is defined in the script description portion S1 of the tag <script>-</script>. In the event\_handler1 function, the output contents "Meteorological information! Heavy rain and flood warning in southern district of Hyogo!" is described that is displayed when the digital broadcast reception device 41 receives the event message  
20 {if(evt.typ=="EventMessageFired")}.  
25

#### 4.3 Flowchart

The actions of the digital broadcast transmission device 31 and digital broadcast reception device 41 of the present embodiment are the same as those of the first  
25 embodiment (see Figs. 12, 13). Consequently, their

description is omitted here.

#### [Other Embodiments]

In the above-mentioned first embodiment, message IDs  
5 were sent together with commercial data, which is output  
content data.

It may be possible, however, to first send all commercial  
data scheduled for broadcast in a single batch transmission,  
and store them in the memory 411 of the digital broadcast  
10 reception device 91. In this case, the output forms are  
also included with the data, in order to specify the  
commercial data to be displayed. Based on this data, the  
digital broadcast reception device 91 retrieves the  
specified items from the commercial data stored in the  
15 memory 411.

Additionally, in the above-mentioned first embodiment,  
as an example the data structure of output forms in the  
reference table T3 of the message ID and output form had an  
output form description portion a3, a display position  
20 description portion a31, an output yes or no description  
portion a33, an output time description portion a35, an  
output condition description portion a37, a temporary  
storage data description portion a39, and a display data  
location description portion a41. However, as long as  
25 there is a means to determine the output form of sub

contents data, the embodiments are not limited to this example. The same holds for the second embodiment.

It is also possible for an output form data structure to have some of the items mentioned above.

6 Furthermore, although the output content of the sub contents in the above-mentioned first embodiment was commercials, the embodiments are not limited to this example. It is also possible for the output content to be a different program from the one currently being broadcast.

10 In the above-mentioned second embodiment, the main contents were programs and program-related content in HTML format, and the like, and the sub contents was described as emergency information. However, the embodiments are not limited to this. Anything is permissible, as long as the  
15 main contents data and sub contents data can be multiplexed, and a transport stream can be generated.

20 In addition, in the above-mentioned second embodiment, as an example the data structure of output form had an output form description portion a3, a display position description portion a31, an output yes or no description portion a33, an output time description portion a35, and an output condition description portion a37. However, as long as there is a means to determine the output form of sub contents data, the embodiments are not limited to this  
25 example.

For example, when displaying emergency information, it is possible to define such parameters as background images, background colors, text font and formatting, and the like. It is also possible to specify sounds to be  
5 played in coordination with the sub contents. For example, in the case of emergency information, it is possible to add attention-getting sounds, and in the case of a news flash for professional baseball or the like, it is permissible to add fanfare sounds, and the like.

Furthermore, in the above-mentioned second embodiment, as an example the data structure of the output form had an output form description portion a3, a display position description portion a31, an output yes or no description portion a33, an output time description portion a35, and an  
10 output condition description portion a37. However, it is permissible for this structure to have a portion of these.

#### **Industrial Applicability**

As described above, the broadcast system of the  
20 present invention will be effective as a broadcast system which displays emergency information, and as a broadcast system which switches between programs and advertisements, and is especially suited to use as a broadcast system which generates transport streams by multiplexing main contents  
25 and sub contents.



What is claimed is:

1. A broadcast system comprising:

a transmission device including

a multiplex portion for multiplexing at least  
5 main contents data and sub contents data so as to generate  
a transport stream,

a transmission portion for transmitting the  
transport stream generated by the multiplex portion,

the multiplex portion generating the sub  
10 contents data including an output form ID that indicates an  
output form of the sub contents as well as an output  
contents data that indicate an output contents; and

a reception device including

a reception portion for receiving the transport  
15 stream transmitted by the transmission device,

a reconstruction portion for controlling  
reconstruction of main contents and sub contents in  
accordance with the received transport stream,

the reconstruction portion determining the  
20 output form of the sub contents data in accordance with the  
output form that is predetermined for the output form ID in  
the received sub contents data, and determining the output  
contents of the sub contents data in accordance with the  
output contents data in the received sub contents data, so  
25 as to perform the reconstruction control of the sub

contents data.

2. A transmission device comprising:

a multiplex portion for multiplexing at least main contents data and sub contents data so as to generate a transport stream; and

a transmission portion for transmitting the transport stream generated by the multiplex portion;

the multiplex portion generating the sub contents data including an output form ID that indicates an output form of the sub contents as well as an output contents data that indicate an output contents.

3. A reception device comprising:

a reception portion for receiving the transport stream transmitted by a transmission device; and

a reconstruction portion for controlling reconstruction of main contents and sub contents in accordance with the received transport stream;

the reconstruction portion determining the output form of the sub contents data in accordance with the output form that is predetermined for an output form ID in the received sub contents data, and determining the output contents of the sub contents data in accordance with the output contents data in the received sub contents data, so as to perform the reconstruction control of the sub contents data.

11. The device or the system according to any one of claims 1-9, wherein the sub contents are emergency information.

12. Contents data in which main contents data and sub contents data are multiplexed, wherein the sub contents data include an output form ID that indicates an output form of the sub contents and output contents data that indicate output contents.

13. A reconstruction program for controlling reconstruction of main contents and sub contents, wherein the reconstruction program determines an output form of sub contents data in accordance with a predetermined output form for an output form ID in the sub contents data and determines output contents of the sub contents data in accordance with output contents data in the sub contents data, so as to perform reconstruction control of the sub contents data.

14. A data structure comprising:  
an output form description portion that describes an output form; and  
an output form ID description portion that describes an output form ID corresponding to the output form described in the output form description portion.

15. A broadcasting method in a broadcast system including a transmission device and a reception device; the

method comprising the steps of:

in the transmission device,

generating sub contents data including an  
output form ID that indicates an output form of sub  
5 contents and output contents data that indicates output  
contents, and

generating a transport stream by multiplexing  
at least main contents data and the sub contents data, and

transmitting the generated transport stream;  
40 and

in the reception device,

receiving the transport stream transmitted by  
the transmission device,

determining the output form of the sub contents  
15 data in accordance with the output form that is  
predetermined for the output form ID in the received sub  
contents data, and determining the output contents of the  
sub contents data in accordance with the output contents  
data in the received sub contents data, so as to perform  
20 the reconstruction control of the sub contents data, and

controlling reconstruction of the main contents  
in accordance with the received transport stream.

16. A method for generating a transport stream, the  
method comprising the steps of:

25 generating sub contents data including an output form

4. The broadcast system according to claim 1 or the reception device according to claim 3, wherein an output form table describing the output form ID and the output form corresponding thereto is recorded in the reception device.

5. The device or the system according to any one of claims 1-4, wherein the output form includes at least a display position of the sub contents.

6. The device or the system according to any one of claims 1-5, wherein the output form includes at least information about whether the sub contents are outputted or not.

7. The device or the system according to any one of claims 1-6, wherein the output form includes at least an output time of the sub contents.

8. The device or the system according to any one of claims 1-7, wherein the output form includes at least an output condition of the sub contents.

9. The reception device or the system according to any one of claims 1 and 3-8, wherein the reception device determines the output form of the sub contents in accordance with a predetermined output form when the received output form ID is not a predetermined one.

10. The device or the system according to any one of claims 1-9, wherein the sub contents are commercial.

ID that indicates an output form of the sub contents as well as an output contents data that indicate an output contents; and

generating a transport stream by multiplexing at least main contents data and the sub contents data.

17. A method for reconstructing a transport stream, the method comprising the steps of:

receiving a transport stream transmitted by a transmission device;

determining an output form of sub contents data in accordance with the output form that is predetermined for an output form ID in the received sub contents data, and determining output contents of the sub contents data in accordance with the output contents data in the received sub contents data, so as to control the reconstruction of the sub contents data.

## ABSTRACT

A digital broadcast transmission device 31 sends programs to respective digital broadcast reception devices 41, and also sends emergency information thereto in the case of an emergency. In the event of a transmission of emergency information, the digital broadcast system 51 sends an event message. An event message is made up of a message ID consisting of alphanumeric characters and the like, and output content showing emergency information content. When a digital broadcast reception device 41 receives an event message, the device determines the output form based on the message ID. Output forms are prescribed formats for displaying output content on a display device 417. Output content is displayed on the display device 417 based on the determined output form.

FIG. 1


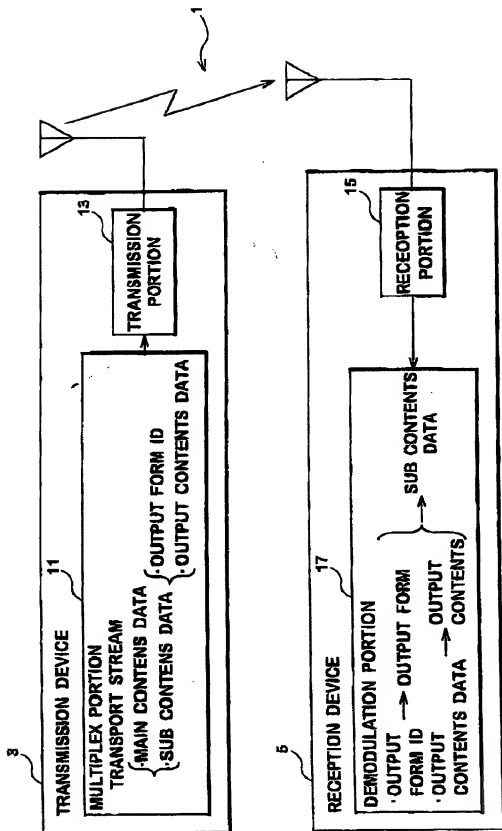




FIG. 2

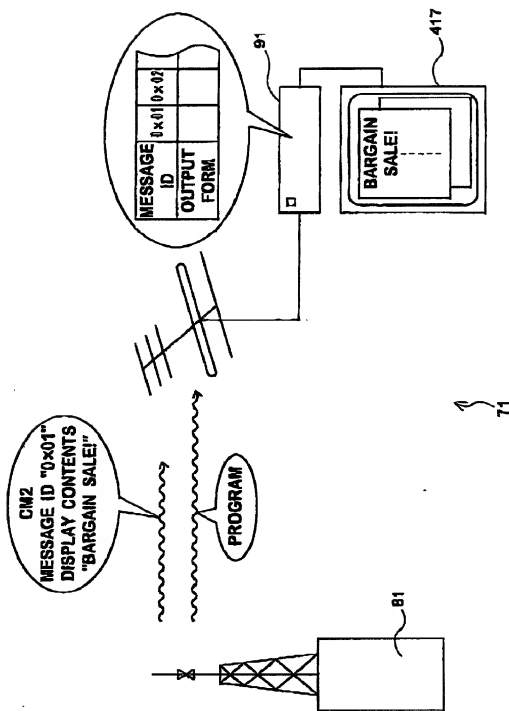

**FIG.3**

**HARDWARE STRUCTURE OF DIGITAL BROADCAST TRANSMISSION DEVICE 81**


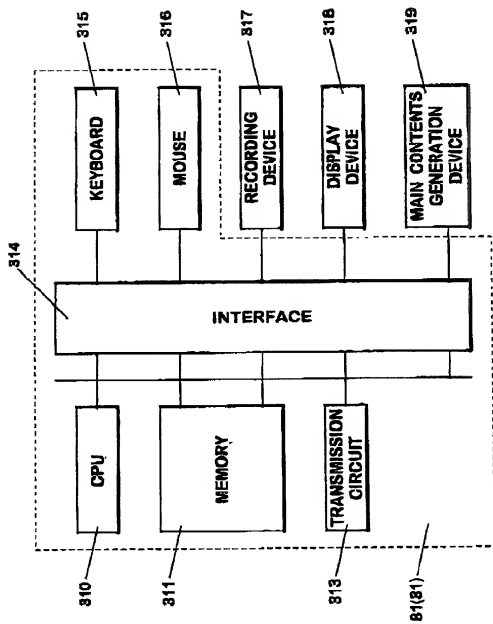



FIG. 4

HARDWARE STRUCTURE OF DIGITAL BROADCAST RECEPTION DEVICE 91

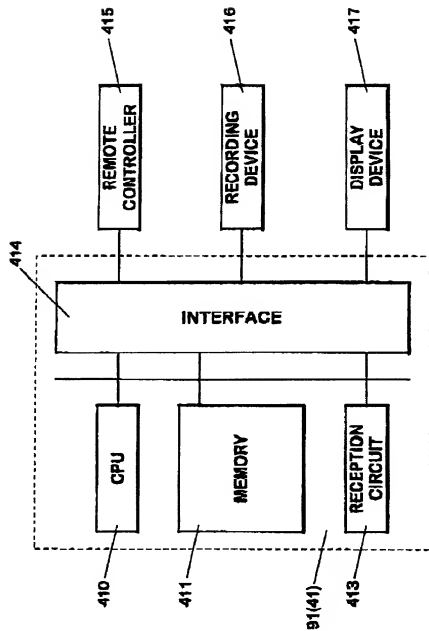

**FIG.5**

**DATA STRUCTURE OF THE REFERENCE TABLE  
OF THE MESSAGE ID AND THE DISPLAY FORM**

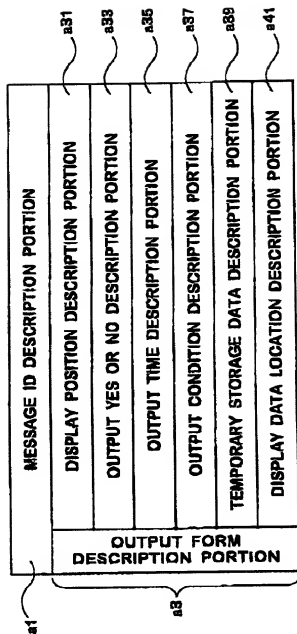

**FIG.6**

**EXAMPLE OF THE REFERENCE TABLE OF  
THE MESSAGE ID AND OUTPUT FORM**

ID	b1			b2			b3			b4			b5			b6		
	0x01	0x02	0x03	0x04	0x05	0x06	0x07	0x08	0x09	0x0A	0x0B	0x0C	0x0D	0x0E	0x0F	0x10	0x11	0x12
OUTPUT FORM DESCRIPTION PORTION	ACTIVE	ACTIVE	ACTIVE	ACTIVE	ACTIVE	ACTIVE	ACTIVE	ACTIVE	ACTIVE	ACTIVE	ACTIVE	ACTIVE	ACTIVE	ACTIVE	ACTIVE	ACTIVE	ACTIVE	ACTIVE
	OUTPUT	NO OUTPUT	NO OUTPUT	NO OUTPUT	NO OUTPUT	NO OUTPUT	NO OUTPUT	NO OUTPUT	NO OUTPUT	NO OUTPUT	NO OUTPUT	NO OUTPUT	NO OUTPUT	NO OUTPUT	NO OUTPUT	NO OUTPUT	NO OUTPUT	NO OUTPUT
	MESSAGE ID RETRIEVAL TIME	MESSAGE ID RETRIEVAL TIME	MESSAGE ID RETRIEVAL TIME	MESSAGE ID RETRIEVAL TIME	MESSAGE ID RETRIEVAL TIME	MESSAGE ID RETRIEVAL TIME	MESSAGE ID RETRIEVAL TIME	MESSAGE ID RETRIEVAL TIME	MESSAGE ID RETRIEVAL TIME	MESSAGE ID RETRIEVAL TIME	MESSAGE ID RETRIEVAL TIME	MESSAGE ID RETRIEVAL TIME	MESSAGE ID RETRIEVAL TIME	MESSAGE ID RETRIEVAL TIME	MESSAGE ID RETRIEVAL TIME	MESSAGE ID RETRIEVAL TIME	MESSAGE ID RETRIEVAL TIME	MESSAGE ID RETRIEVAL TIME
	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
OUTPUT FORM DESCRIPTION PORTION	MAIN CONTENTS TIME STAMP	SUB CONTENTS TIME STAMP	DO NOT SAVE	DO NOT SAVE	DO NOT SAVE	DO NOT SAVE	DO NOT SAVE	DO NOT SAVE	DO NOT SAVE	DO NOT SAVE	DO NOT SAVE	DO NOT SAVE	DO NOT SAVE	DO NOT SAVE	DO NOT SAVE	DO NOT SAVE	DO NOT SAVE	DO NOT SAVE
	RECEIVED OUTPUT CONTENTS	MAIN CONTENTS	MAIN CONTENTS	MAIN CONTENTS	MAIN CONTENTS	MAIN CONTENTS	MAIN CONTENTS	MAIN CONTENTS	MAIN CONTENTS	MAIN CONTENTS	MAIN CONTENTS	MAIN CONTENTS	MAIN CONTENTS	MAIN CONTENTS	MAIN CONTENTS	MAIN CONTENTS	MAIN CONTENTS	MAIN CONTENTS
	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

**FIG.7**

**EXAMPLE OF THE RELATIONSHIP BETWEEN  
REPRESENTATIVE SITUATION AND THE MESSAGE ID**

0x01 : INTERRUPT THE DISPLAY OF MAIN CONTENTS AND BEGIN THE DISPLAY OF SUB CONTENTS  
0x02 : INTERRUPT THE DISPLAY OF SUB CONTENTS / RE-INITIATE THE DISPLAY OF MAIN CONTENTS  
0x03 : INTERRUPT THE DISPLAY OF SUB CONTENTS / RE-INITIATE THE PLAYBACK OF MAIN CONTENTS  
0x04 : TERMINATE THE DISPLAY OF MAIN CONTENTS AND SUB CONTENTS  
0x05 : INTERRUPT THE DISPLAY OF MAIN CONTENTS / RESUME THE DISPLAY OF SUB CONTENTS

FIG.8

H3

```

<html>
<head>
<style type="text/css">
@media:tv{
#text1 {position:absolute;
        left:50px; top:300px;width:700px; height:150px; }
#text2 {position:absolute;
        left:50px; top:500px;width:700px; height:150px; }
}
</style>
<event>
  <item type="stream_event"
        econd="event_msg_id=0x01"
  </item>
</event>
</head>
<body>
  <object id="text1" type="text/plain"
        message1 of CM1<p>
  </object>
  <object id="text2" type="text/plain"
        message2 of CM1<p>
  </object>
</body>
</html>

```

E3



**FIG.9****SCREEN DISPLAY OF CM1**



FIG.10

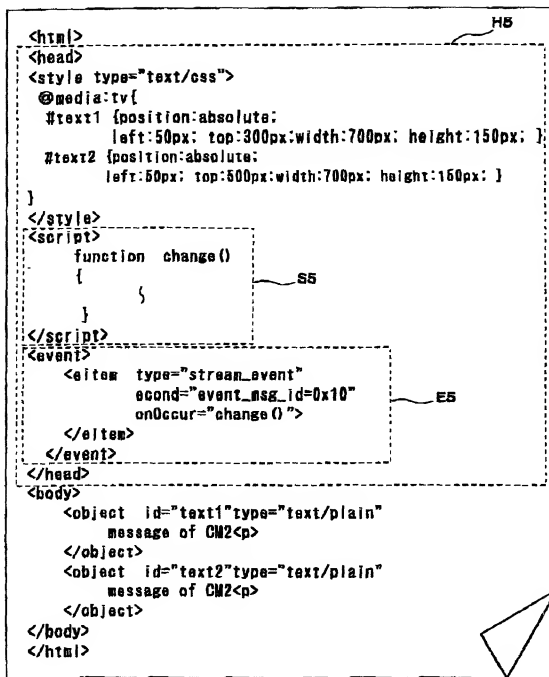


**FIG.11****SCREEN DISPLAY OF CM2**

FIG.12

OPERATION BY DIGITAL BROADCAST TRANSMISSION DEVICE 81

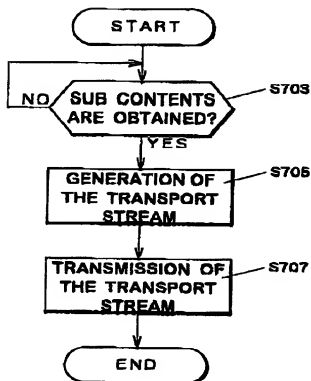


FIG.13

OPERATION BY DIGITAL BROADCAST RECEPTION DEVICE 91

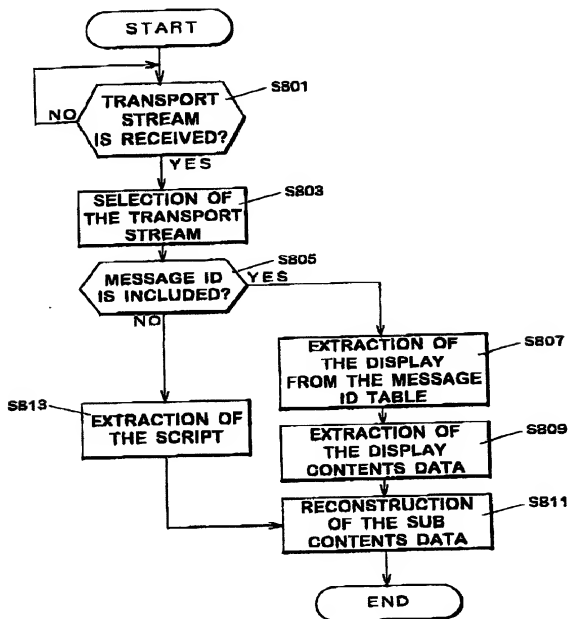


FIG.14

CASE1

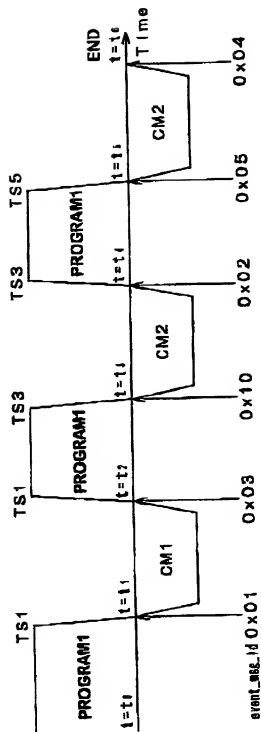


FIG. 15

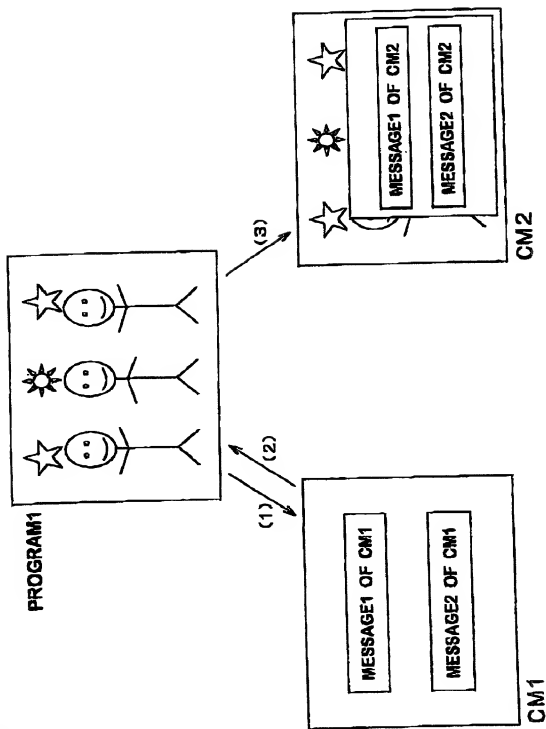


FIG.16

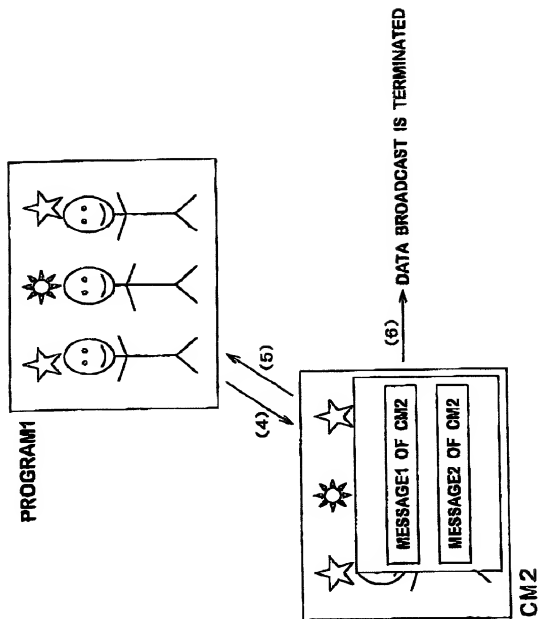


FIG. 17

CONCEPTUAL DRAWING OF THE BROADCAST SYSTEM 51

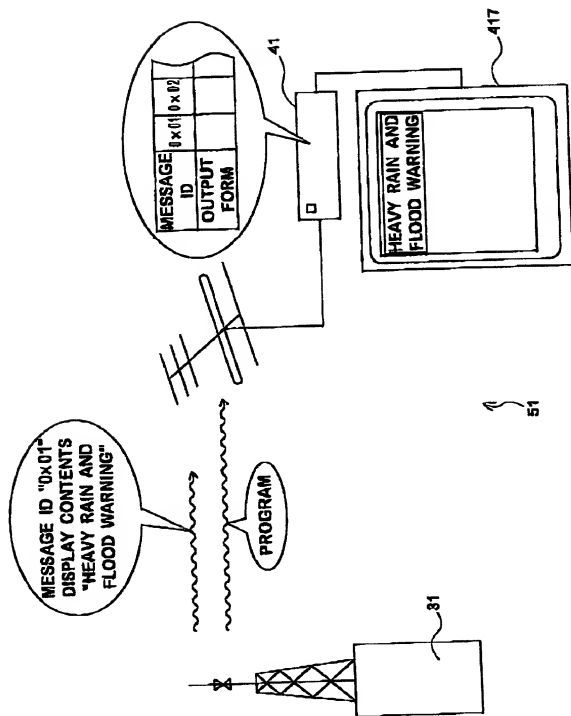




FIG.18

DATA STRUCTURE OF THE REFERENCE TABLE  
OF THE MESSAGE ID AND THE DISPLAY FORM

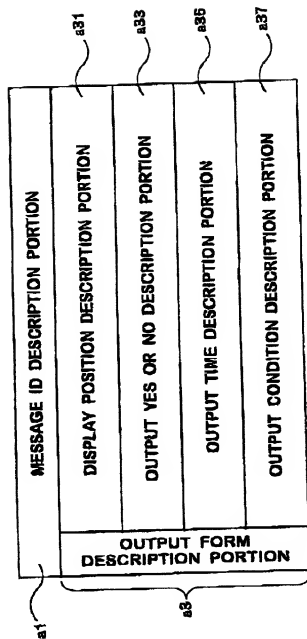


FIG.19

ID	b1			b2			b3			T1		
	0x01			0x02			0x03			b11		
	ACTIVE: 50, 300, 400, 100			50, 300, 400, 100			50, 300, 400, 100			b13		
	OUTPUT			OUTPUT			OUTPUT			b15		
	—			WHEN THE MESSAGE ID IS OBTAINED			WHEN THE MESSAGE ID IS OBTAINED OPEN THE OTHER WINDOW			b17		
OUTPUT FORM DESCRIPTION											—	b19

FIG.20

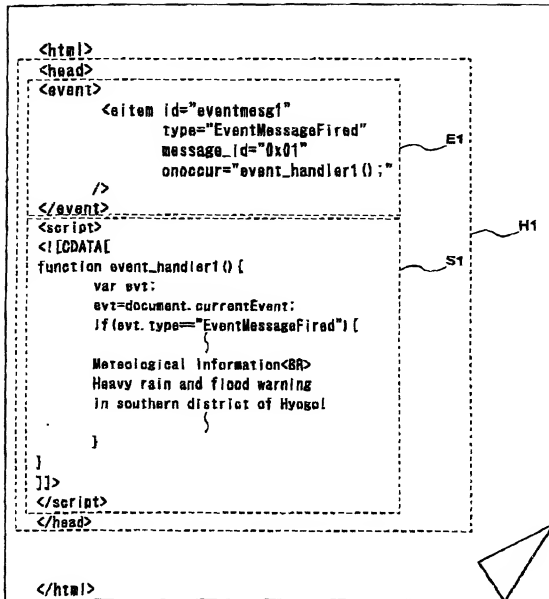


FIG.21

SCREEN IN THE CAST THAT EMERGENCY INFORMATION  
IS DISPLAYED ON AN EXISTING BROADCAST SYSTEM

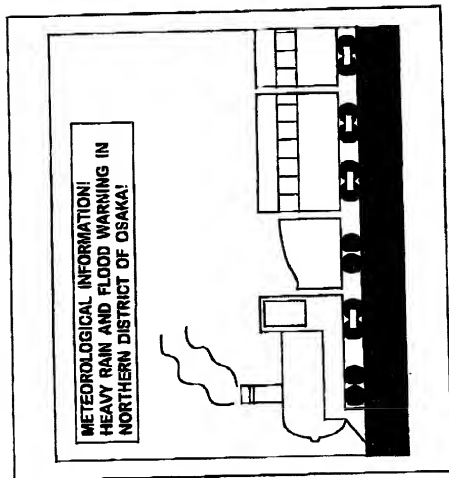



FIG.22

EXAMPLE OF MESSAGE ID TABLE

ID NUMBER	POSITION	CONTENTS
0x01	50,300,700,150	METEOROLOGICAL INFORMATION HEAVY RAIN AND FLOOD WARNING IN ALL AREA OF OSAKA!
0x02	50,300,700,150	METEOROLOGICAL INFORMATION HEAVY RAIN AND FLOOD WARNING IN ALL AREA OF HYOGO!
0x03	50,300,700,150	METEOROLOGICAL INFORMATION HEAVY RAIN AND FLOOD WARNING IN ALL AREA OF KYOTO!
0x04	50,300,700,150	METEOROLOGICAL INFORMATION HEAVY RAIN AND FLOOD WARNING IN ALL AREA OF NARA!
0x11	50,300,700,150	METEOROLOGICAL INFORMATION HEAVY RAIN AND FLOOD WARNING IN NORTHERN DISTRICT OF OSAKA!
0x12	50,300,700,150	METEOROLOGICAL INFORMATION HEAVY RAIN AND FLOOD WARNING IN SOUTHERN DISTRICT OF OSAKA!
0x51	50,900,700,150	EARTHQUAKE INFORMATION ...
0x99		DISPLAY IN CONFORMANCE WITH THE SCRIPT

FIG. 23

CONSTITUTIONAL DIAGRAM OF TRANSMISSION DEVICE AND  
RECEPTION DEVICE IN CONVENTIONAL BROADCAST SYSTEM

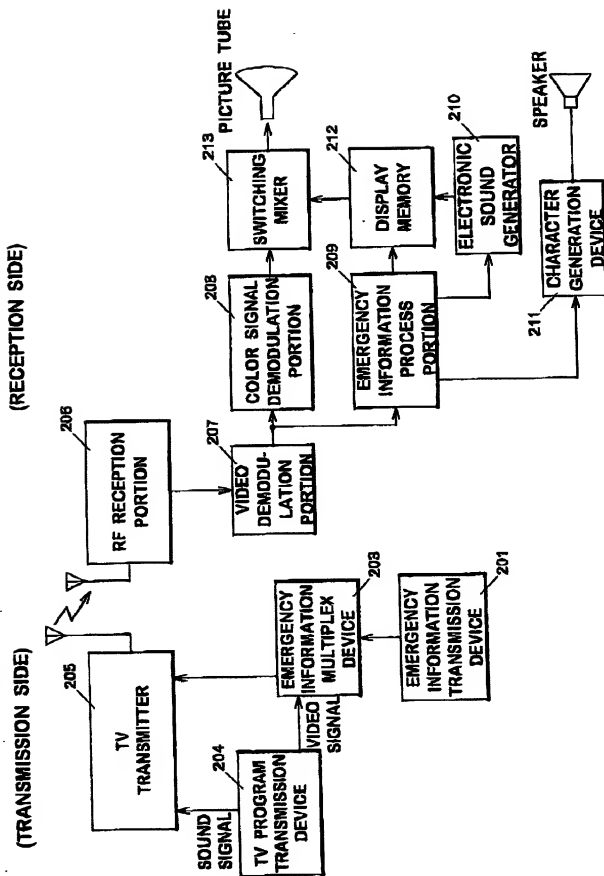

## Declaration and Power of Attorney For Patent Application

## 特許出願宣言書及び委任状

## Japanese Language Declaration

## 日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であるとして（下記の名称が複数の場合）信じています。

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or and original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

## BROADCAST SYSTEM

上記発明の詳細書（下記の欄で×印が×ついていない場合は、本書に添付）は、

☐ 月 日に提出され、米国出願番号または特許協力条約国際出願番号を \_\_\_\_\_ とし、  
(該当する場合) \_\_\_\_\_ に訂正されました。

the specification of which is attached hereto unless the following box is checked:

☒ was filed on May 29, 2000  
as United States Application Number or  
PCT International Application Number  
PCT/JP00/03443 and was amended on  
\_\_\_\_\_ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability, as defined in Title 37, Code of Federal Regulations, Section 1.56.

## Japanese Language Declaration

## (日本語宣言書)

私は、米国特許法第35条119条(a)-(4)項または365条(c)項に基づき下記の、米国以外の国の少なくとも一つを指定している特許権力条項365(a)項に基づき出願し、又は外国での特許出願もしくは発明権の出願について、外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許又は発明権の出願を以下に、特内をチェックすることで、示しています。

I hereby claim foreign priority under Title 35, United States Code, Section 119(a)-(4) or 365(c) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

外国での先行出願

Priority Not Claimed

優先権主張なし

Hei 11-14925 (P)

(14925/1999)

JAPAN

(29/5/1999)

(Number)  
(番号)(Country)  
(国名)(Day/Month/Year Filed)  
(出願年月日)(Number)  
(番号)(Country)  
(国名)(Day/Month/Year Filed)  
(出願年月日)

私は、第35条米国特許法第119条(a)項に基づいて下記の米国特許出願規定に記載された特許をここに主張いたします。

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)  
(出願番号)(Filing Date)  
(出願日)(Application No.)  
(出願番号)(Filing Date)  
(出願日)

私は、下記の米国特許法第35条120条に基づいて下記の米国特許出願に記載された特許、又は米国を指定している特許権力条項365(c)項に基づき権利をここに主張します。また、本出願の各条項の内部の外国特許法第35条112条第1項又は特許権力条項で規定された方法で先行する外国特許出願に開示されていない限り、その先行米国出願提出日より前で本出願書の日本国内または特許権力条項の提出日より前で開示された、特許法第35条37条1条56項で定義された特許技術の有益性に関する重要な情報について開示義務があることを認識しています。

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which becomes available between the filing date of the prior application and the national or PCT international filing date of application.

PCT/JP00/03443

29/5/2000

Pending

(Application No.)  
(出願番号)(Filing Date)  
(出願日)(Status: Pending, Pending, Abandoned)  
(状況: 特許許可申請、保留中、放棄済み)(Application No.)  
(出願番号)(Filing Date)  
(出願日)(Status: Pending, Pending, Abandoned)  
(状況: 特許許可申請、保留中、放棄済み)

私は、私自身の知識に基づいて本宣言書中で私が行う声明が真実であり、かつ私の入手した情報と私の信じることに基づく資料が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国特許法第18条第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行えば、出願した、又は出願に許可された特許の有効性が失われることを認識し、よってここに上記のことに宣誓を致します。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patents issued thereon.



## Japanese Language Declaration

(日本語宣言書)

任状: 私は下記の発明者として、不出願に関する一切の手  
を米国特許商標局に対して遂行する弁理士または代理人とし  
て、下記の者を指名いたします。(弁理士、または代理人の氏名  
及び登録番号を明記のこと)。

Michael D. Bednarek, Reg. No. 32,329  
Lawrence J. Gots, Reg. No. 31,183  
Aslan Baghdadi, Reg. No. 34,532  
Elizabeth M. Rosell, Reg. No. 34,878  
David C. Isaacson, Reg. No. 38,500  
Michael S. Lee, Reg. No. 41,434  
Steven P. Anheim, Reg. No. 43,475  
Poh C. Chua, Reg. No. 44,615  
Michele Burris, Reg. No. 44,576  
Michael A. Oblon, Reg. No. 48,956  
Lawrence D. Eisen, Reg. No. 41,009

POWER OF ATTORNEY: As a named inventor, I hereby ap-  
point the following attorney(s) and/or agent(s) to prosecute  
this application and transact all business in the Patent and  
Trademark Office connected therewith (list name and registra-  
tion number)

書翰の送付先:

Send Correspondence to:

Mr. Michael D. Bednarek  
SHAWPITTMAN  
2300 N Street, N.W.  
Washington, D.C. 20037-1128, U.S.A.

直通電話連絡先: (名称および電話番号)

Mr. Michael D. Bednarek  
(202) 663-8906

Direct Telephone Calls to: (name and telephone number)

Mr. Michael D. Bednarek  
(202) 663-8906

唯一のまたは第一の発明者の氏名		100 Full name of sole or first inventor	
同発明者の署名	日付	Keisai YAMAMURO	
住所		Inventor's signature	Date
国籍		Residence	Mar 30, 2000
郵便の宛先		Moriguchi-shi, Osaka, JAPAN	JPK
第二の共同発明者の氏名 (該当する場合)		200 Full name of second joint inventor, if any	
同第二発明者の署名	日付	Yasuyuki SONODA	
住所		Second inventor's signature	Date
国籍		Residence	Mar 30, 2000
郵便の宛先		Kyoto-shi, Kyoto, JAPAN	JPK
		Citizenship	JAPAN
		Post Office Address	
		22-1, Shinemiyakubouchou, Yamasinaku, Kyoto-shi,	
		Kyoto 607-8028, JAPAN	

(第三の発明者の氏名を明記しても同様に差し、署名をすること)

(Supply similar information and signature for third and subsequent joint inventors.)